




P4800 SYSTEM PROCESSOR

DESCRIPTION

The P4800 System Processor is a 4-input, 8-output digital audio processor. It performs all the necessary functions between the mixers and the power amplifiers in small to medium sized sound systems. Using the P4800's drag-and-drop Graphical User Interface, processors can be placed anywhere in the signal path. The 4-by-8 matrix mixer allows any or all inputs to be routed to any or all outputs with additional controls for levels and polarity. The P4800 can store up to 128 configurations that can be recalled using simple contact closures, MIDI, or RS232 commands.

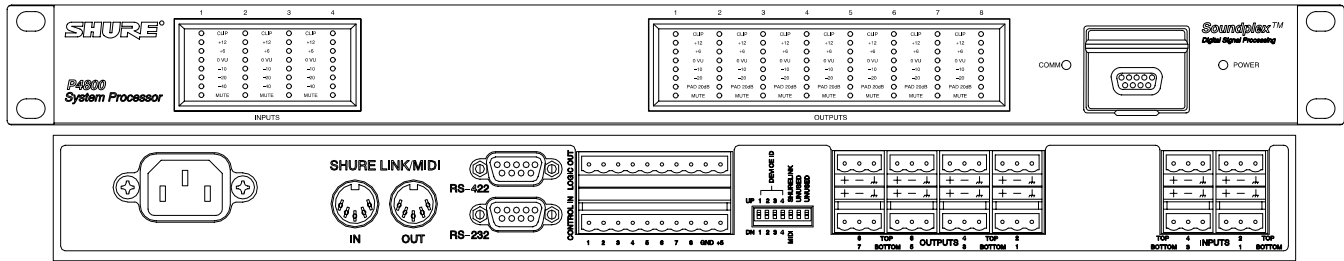

SOFTWARE FEATURES

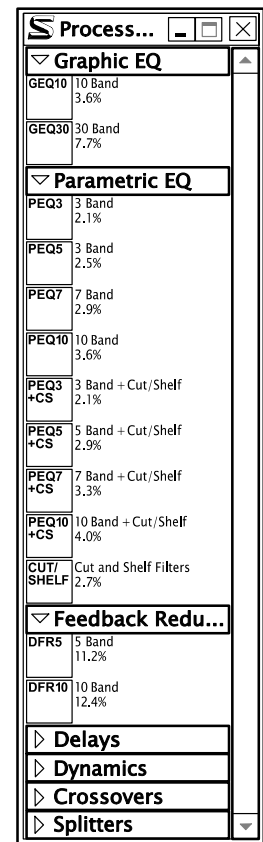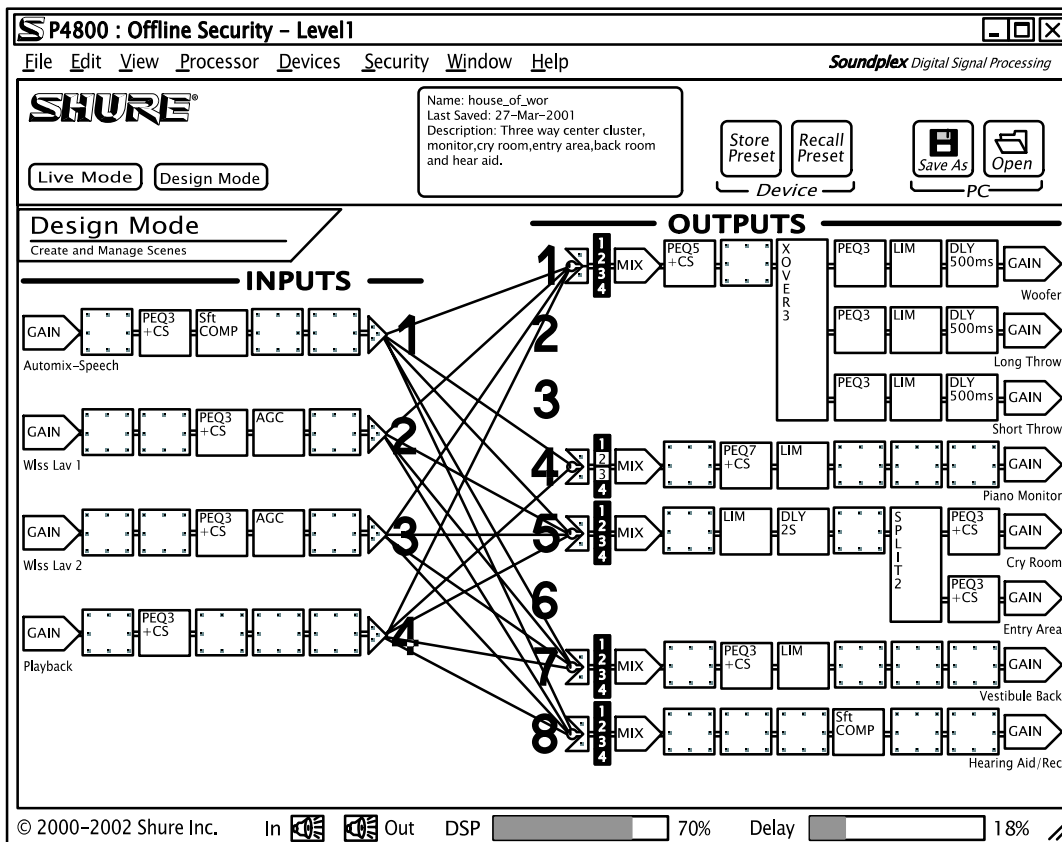

The primary interface for the P4800 is a Windows-based software program that mimics the functional block diagrams used in sound system design. Unlike many other DSP products that constrict design freedom with preset templates, the processing blocks in the P4800 can be applied in any order, to any input or output. Processing blocks can be copied and pasted to duplicate processors across multiple channels. They can also be linked for more efficient stereo or global control.

With the P4800, the entire system can be designed, saved to disk, and loaded at the job site for easy set up. The P4800 also allows real-time design changes, so processing blocks can be added, removed or changed during system tuning. The security options allow complete lock of the system to prevent undesired tampering, or to restrict user access to certain parts of the system.

P4800 SYSTEM PROCESSOR

SPECIFICATIONS

Frequency Response

20 Hz to 20 kHz +1, -3 dB

Dynamic Range

100 dB minimum, A-weighted, 20 Hz to 20 kHz

Sampling Rate

48 kHz

Digital Signal Processing

32-bit floating-point resolution

Polarity

Input to Output: non-inverting (inverting optional)

Impedance

Input: 10 k Ω

Output: 120 Ω

Input Clipping Level

+26dBu minimum

Output Clipping Level

+22 dBu minimum

+2 dBu minimum with 20 dB pad engaged

Total Harmonic Distortion

< 0.05% at 1kHz, +4 dBu, 20 Hz to 20 kHz

Propagation Delay from Input to Output

<1.5 ms (Processing blocks add no latency.)

Polarity

Input to output: non-inverting (inverting optional)

Analog Audio Inputs

4 line level analog inputs, block connectors

Operation level defaults to +4 dBu, software

switchable to -10dBv

24-bit, 48 kHz A to D conversion

+26 dBu input clipping level @ 1% THD

Analog Audio Outputs

8 line level analog outputs, block connectors

Operation level defaults to +4 dBu, software

switchable to -10dBv

24-bit, 48 kHz D to A conversion

+22 dBu output clipping level @ 1% THD (+2 dBu

with 20 dB pad)

Control Pins

Voltage Supply: 5 Vdc, 100 mA (total)

Logic output current sinking ability: 500 mA

Operating Voltage

100-240 Vac, 50/60 Hz (auto-switching)

Maximum Power Drain

60W

Temperature Range

Operating: -5° to 35° C (23° to 95° F)

Storage: -29° to 74° C (-20° to 165° F)

Dimensions

19 in x 11 in x 1 3/4 in

Weight

4.1 kg (9.0 lbs)

Packaged Shipping Weight

6.0 kg (13.2 lbs)

Furnished Accessories

Power Cable (P4800) 95A8389

Power Cable (P4800E) 95A8247

5-pin DIN Shure Link Cable 95A8676

Hardware Kit 90AB8100

12 Block Connector Terminals, 3-pin
(for audio inputs and outputs)

2 Block Connector Terminals, 10-pin
(for control inputs and outputs)

4 Rackmount Screws and Washers

Optional Accessories

DRS10—Wallplate unit with 10-position rotary switch
for preset control

SHURE™

SHURE Incorporated Web Address: <http://www.shure.com>
222 Hartrey Avenue, Evanston, IL 60202-3696, U.S.A.

Phone: 847-866-2200 Fax: 847-866-2279

In Europe, Phone: 49-7131-72140 Fax: 49-7131-721414

In Asia, Phone: 852-2893-4290 Fax: 852-2893-4055

Elsewhere, Phone: 847-866-2200 Fax: 847-866-2585